





Pendulum

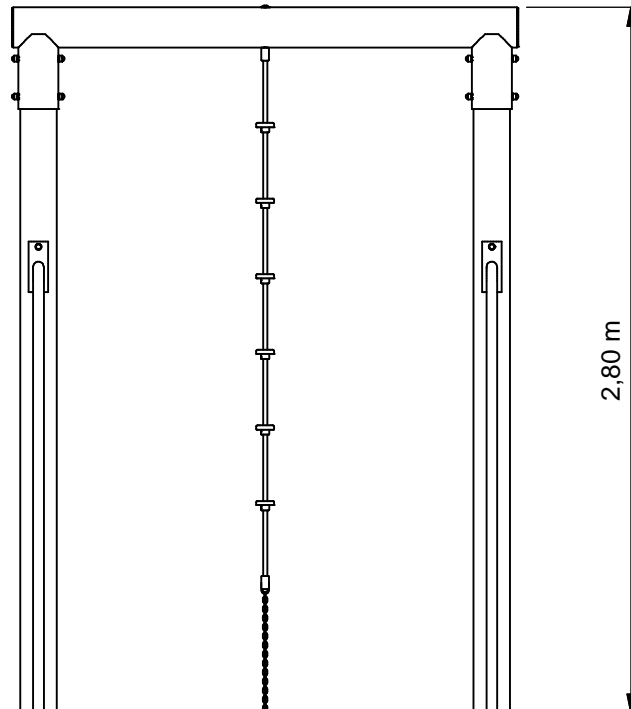

SPTTE100.240

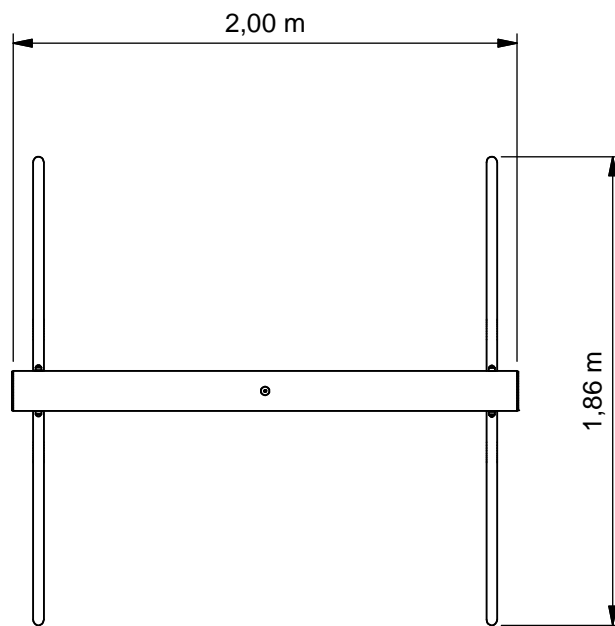

Benaming
Title Slingertoestel


Opmerking
Comment Trimbaan

Datum
Date 3-11-2015

Tekening
Drawing

TOE SPT 100 240

Hoofdafmetingen *Main dimensions*

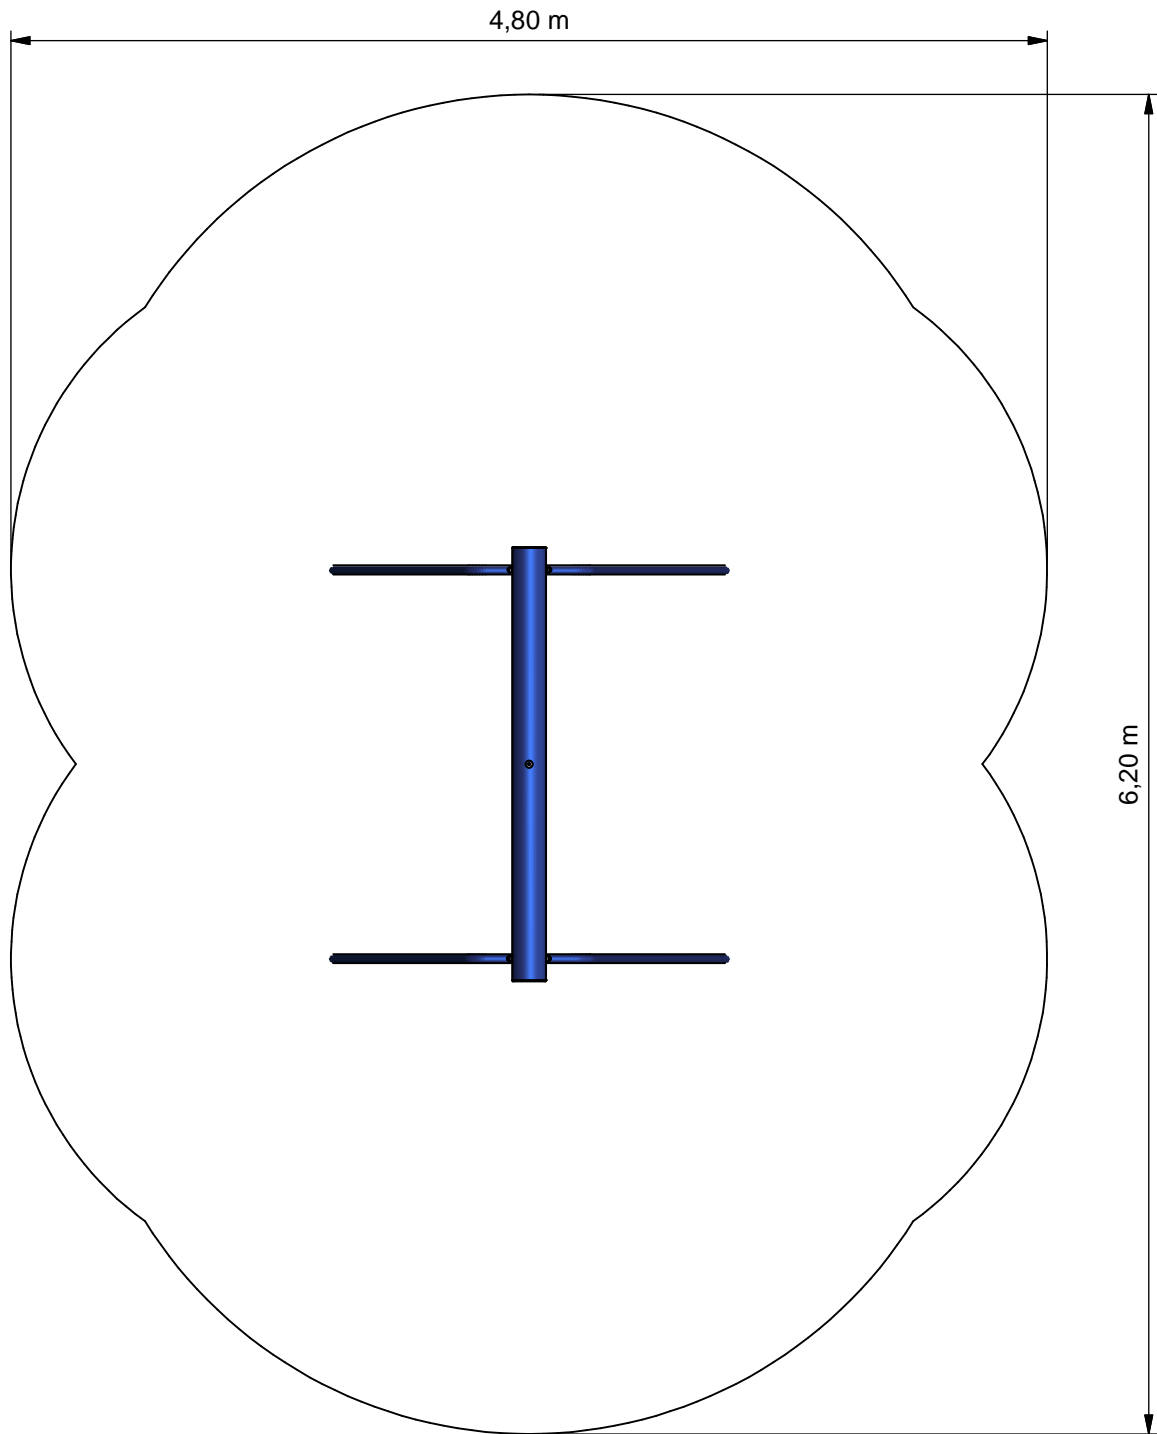

- Opvangzone**
Impact area
- Obstakelvrije zone**
Obstacle free zone



Benaming
Title | Slingertoestel



Opmerking
Comment | Trimbaan

Datum
Date | 3-11-2015

Tekening
Drawing

TOE SPT 100 240

Obstakelvrije zone *Obstacle free zone*

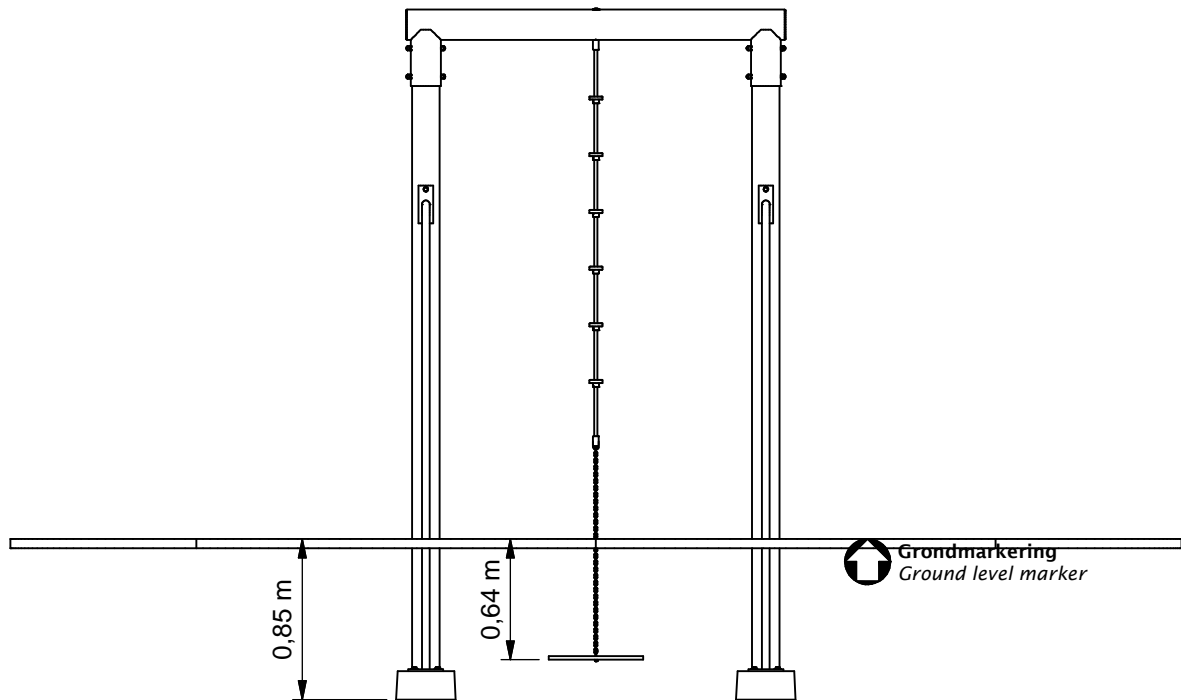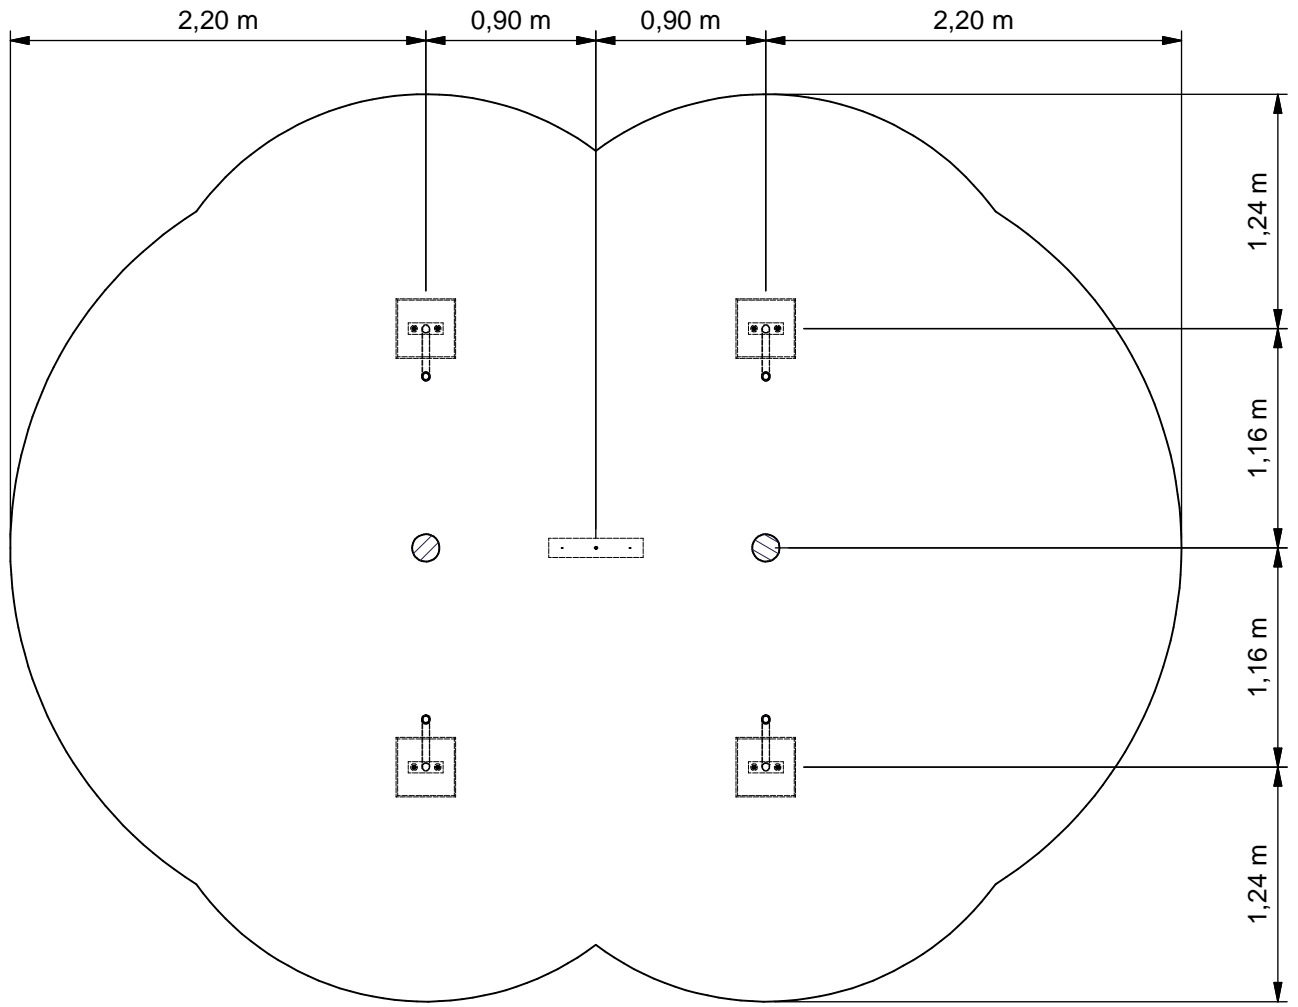

Benaming
Title | Slingertoestel
Opmerking
Comment | Trimbaan
Datum
Date | 3-11-2015

Tekening
Drawing

TOE SPT 100 240

Bodemplan Groundplan

Geleverde modules:

Zie tabel

Supplied modules:

See table

Montageinstructie:

- De hoofdmaten geven de maten van de staanders en vloeren aan
- De detailtekeningen geven specifiek de maten van de verbindingen aan
- De modules met buizen zijn op de tekeningen bemaat op bovenkant kopplaat
- Overige modules zijn bemaat op de bovenkant (klimwanden, paalkappen, etc.)

Assembly instruction:

- The main dimensions indicate the dimensions of the posts and floors
- The detailed dimensions show the specific dimensions of the connections
- The modules which contain tubes are dimensioned at the top of the flanges
- Other modules are dimensioned at the top (climbing walls, caps for the posts, etc.)

Montagevolgorde:

- 1 - Graaf de gaten volgens het bodemplan
- 2 - Plaats 1+4, verbind deze met 2+3
- 3 - Controleer of het toestel voldoet aan de afmetingen zoals op blad 'afmetingen'
- 4 - Dicht de gaten en verdicht het zand

Assembly sequence:


- 1 - Dig the holes according to the ground plan
- 2 - Place 1+4, attach it between 2+3
- 3 - Check that the equipment conforms to the dimensions shown on sheet 'dimensions'
- 4 - Close the holes and compact the sand

Controles:

- 1 - Correcte opbouw en alle bevestigingsmiddelen
- 2 - Controleer de afmetingen van de valbodem t.o.v. het toestel

Checks:

- 1 - Correct assembly and all the fasteners
- 2 - Check the dimensions of the safety area with regard to the play equipment

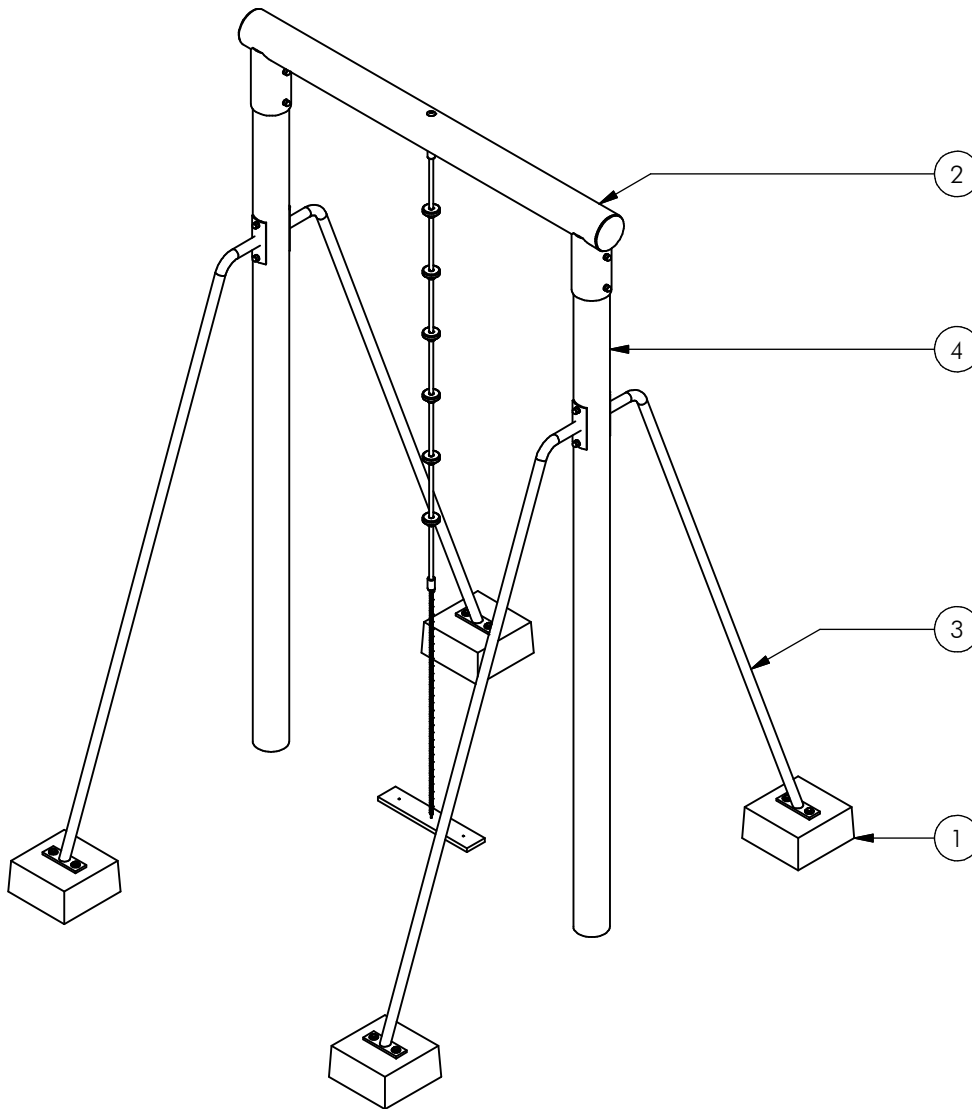

Nr	#	Type	Progr.	Volgnr	Bew.	Rev.	Benaming	Opmerking
1	4	MOD	OBT	009	001		Poer Model 9	Gewicht 33,5 kg
2	1	MOD	SPT	001	004		Bovenbalk	Slingertoestel
3	2	MOD	SPT	001	005		Schoren	Slingertoestel
4	1	MOD	SPT	100	240		Rebo Pakket	SPT.100.240



Benaming
Title | Slingertoestel

Opmerking
Comment | Trimbaan

Datum
Date | 3-11-2015

Tekening
Drawing

TOE SPT 100 240

Modules Modules

SPTE100.240

Pendulum

LOGBOOK

(Onderstaand logboek kan gebruikt worden om te voldoen aan de eisen, gesteld in artikel 14 van het Warenwetbesluit Attractie- en Speeltoestellen)

Type indication	Sports equipment
Product code	SPTE100.240
Name of equipment	Slingertoestel
Maximum height of fall	2,8 m
Year of construction	2017
Certificate	0183402366
inspection authority	BOER SPEELTOESTELLEN HYACINTSTRAAT 2 - 4255HX NIEUWENDIJK
Name manufacturer	BOERplay Hyacintstraat 2 - 4255 HX Nieuwendijk Phone: +31 (0)183 40 23 66 Fax: +31 (0)183 40 35 64
name installer	_____ _____
Description of equipment	Pendulum
Location of equipment	_____
Data about the owner of the play equipment	
Name:	_____
Address:	_____
Postcode and town:	_____
Contact person:	_____
Telephone number:	_____
Data about the administrator of the play equipment	
Name:	_____
Address:	_____
Postcode and town:	_____
Contact person:	_____
Telephone number:	_____

LOGBOOK

Inspection and maintenance intervals



Nr.	Inspection	Maintenance	months between inspections
1	Verify equipment's stability, junctions and missing parts. Inspect bolts, screws and nuts for absence, jams, corrosion and wear.	Add missing parts, secure joints, apply missing fixing agent and replace corroded parts.	1
2	Check suspension for wear.	Replace worn parts and/or remove non-functioning parts.	1
3	Inspect rotating parts such as hinges, rolling-element bearings, etc. for wear and acceptability.	Replace worn parts and/or remove non-functioning parts.	1
4	Check wood for splinters, unacceptable damage and signs of rot. Especially at ground level.	Repair damage. Replace affected wood. Smoothen splintered wood and sharp edges.	1
5	Inspect foundation for stability, tearing and coverage.	Restore foundation and covering material.	3
6	Examine rubber and synthetic parts for wear, damage and break.	Replace original parts.	3
7	Inspect metal for corrosion and damage in the coating.	Restore any damaged coating (after removing rust and applying primer).	6
8	Check ropes, cables, chains and nets for wear and damage. Steel cables and nets which are tensioned must be checked for tension.	Replace parts where necessary. Steel cables and nets must be tensioned.	3
9	Inspect equipment for unsafe changes and additions.	Remove unsafe additions and correct unsafe changes.	1
10	Inspect safety surfaces.	Restore and repair where necessary.	1

Remarks


1. If used intensively, all points require extra attention.
2. Extreme weather conditions and locations may require a higher inspection frequency. Discuss this with the supplier.
3. Vandalism-sensitive locations require stricter inspections, possibly daily.
4. Check the terrain regularly for items that do not belong there, are unsafe or may be used wrongly. Examples are poisonous plants, glass shards, etc. Frequency depends on strain.
5. Remember that bad maintenance leads to unsafe conditions and notably faster impoverishment of the playground area.
6. Replacement parts can be ordered at the manufacturer with the part numbers on the module drawing. Drawings can be found in de user guide.
7. The impact area shall be provided with impact attenuating surface according to the specified falling height.
8. This list is conform the CEN-standard "playground equipment and surfacing NEN-EN 1176-7".



Dit toestel is geen speeltoestel conform het warenwetbesluit attractie- en speeltoestellen, en is dus niet als zodanig gecertificeerd.

This equipment is not playground equipment, so it has not been certified as such.



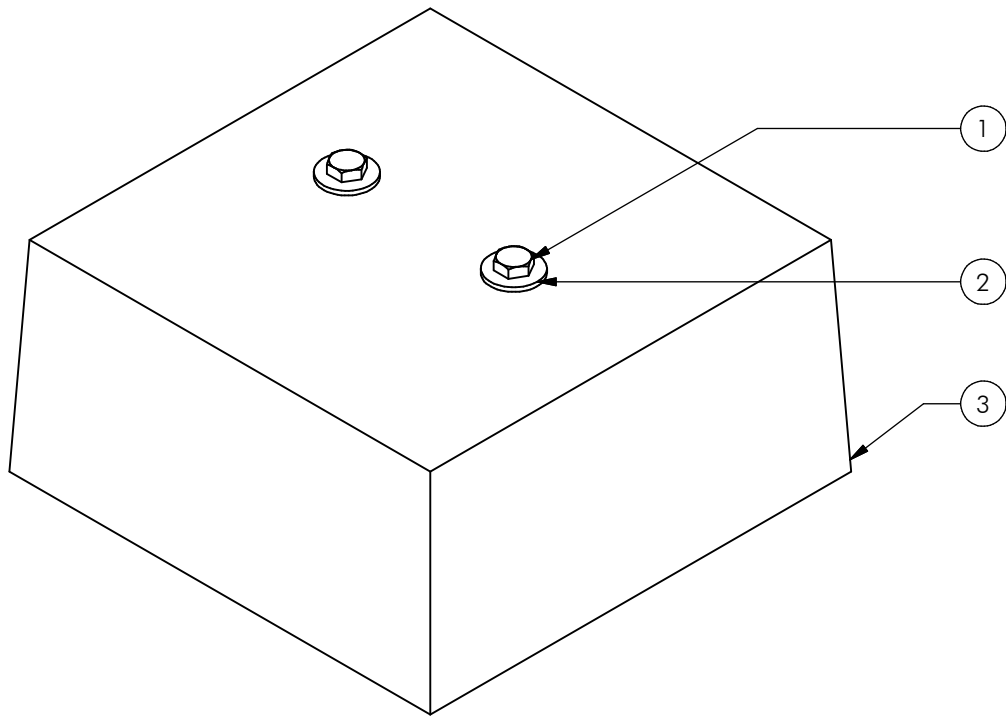

Nr	#	Type	Progr.	Volgnr	Bew.	Rev.	Benaming	Opmerking
1	2	BSV	021	012	040		Zeskantbout ISO 4014	M12 x 40 - VZ 8.8
2	2	BSV	035	012	035		Carrosseriering	M12 x 35 - VZ 8.8
3	1	OBT	POE	009	033		POER	MODEL 9



Benaming
Title Poer Model 9


Opmerking
Comment Gewicht 33,5 kg

Datum
Date 17-8-2012

Tekening
Drawing

MOD OBT 009 001

Samenstelling module *Assembly module*

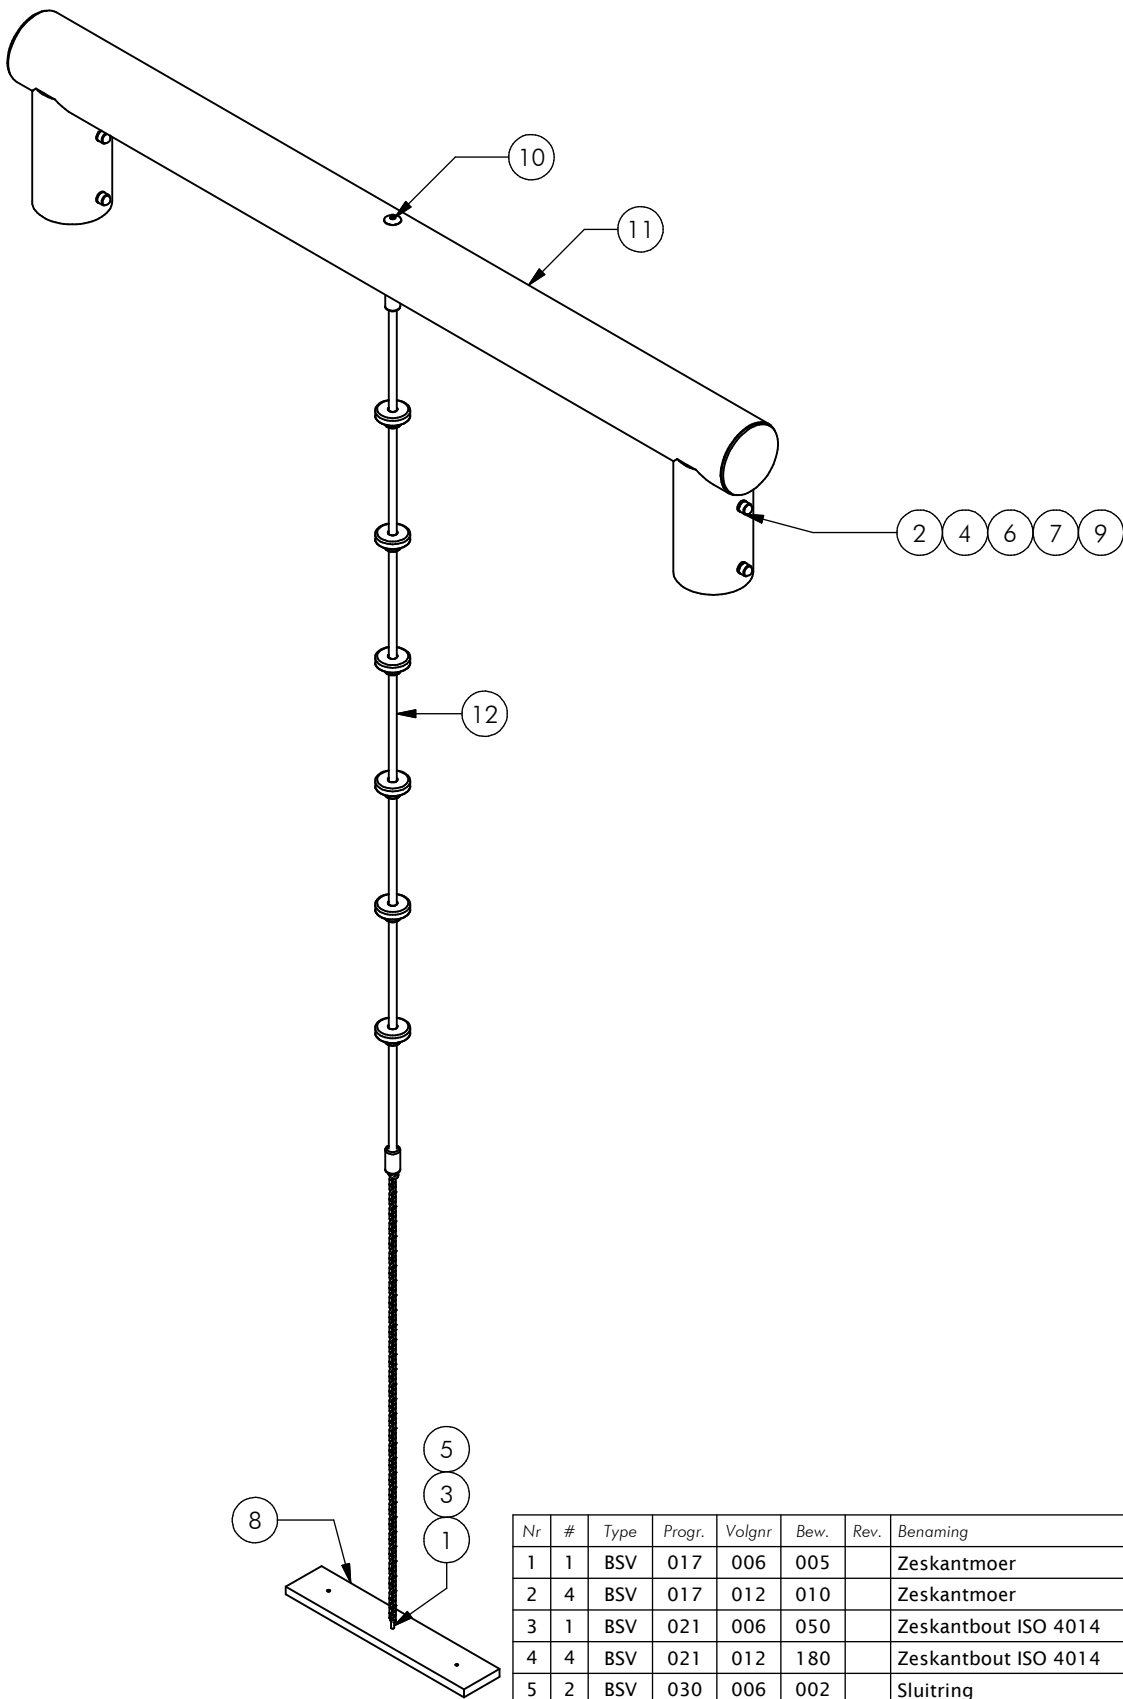

Nr	#	Type	Progr.	Volgnr	Bew.	Rev.	Benaming	Opmerking
1	1	BSV	017	006	005		Zeskantmoer	M6 - VZ 8.8
2	4	BSV	017	012	010		Zeskantmoer	M12 - VZ 8.8
3	1	BSV	021	006	050		Zeskantbout ISO 4014	M6 x 50 - VZ 8.8
4	4	BSV	021	012	180		Zeskantbout ISO 4014	M12 x 180 - VZ 8.8
5	2	BSV	030	006	002		Sluitring	M6 - VZ 8.8
6	8	BSV	030	012	003		Sluitring	M12 - VZ 8.8
7	4	BSV	032	012	002		Veerring	M12 - VZ 8.8
8	1	KST	APL	050			Ankerplaat	500x100x19
9	8	KST	ZKD	012	024		Afdekdop zeskantbout	M12 zwart
10	1	RNT	BUS	M12	050		Hulsschroef	M12 x 50 - RVS A2-70
11	1	SME	SPT	094	502		Bovenbalk	Slingertoestel
12	1	SNT	SPT	002	030		Klimladder	Touw rond16



Benaming
Title: Bovenbalk


Opmerking
Comment: Slingertoestel

Datum
Date: 3-11-2015

Tekening
Drawing

MOD SPT 001 004

Samenstelling module Assembly module

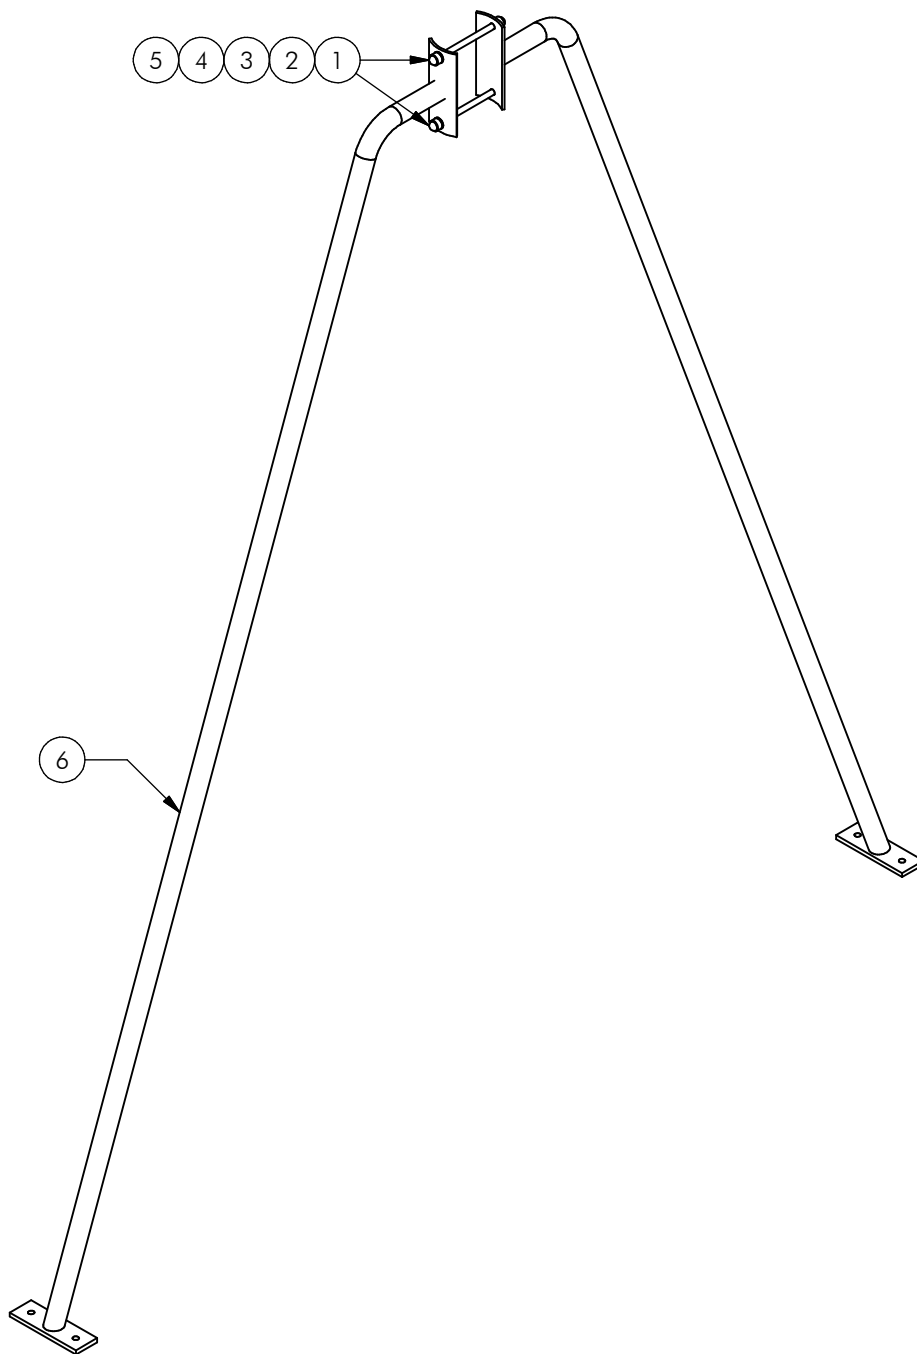

Nr	#	Type	Progr.	Volgnr	Bew.	Rev.	Benaming	Opmerking
1	2	BSV	017	012	010		Zeskantmoer	M12 - VZ 8.8
2	2	BSV	021	012	180		Zeskantbout ISO 4014	M12 x 180 - VZ 8.8
3	4	BSV	030	012	003		Sluitring	M12 - VZ 8.8
4	2	BSV	032	012	002		Veerring	M12 - VZ 8.8
5	4	KST	ZKD	012	024		Afdekdop zeskantbout	M12 zwart
6	2	SME	JGP	014	502		Schoor Ø42.4x2.9	voorheen type N



Benaming
Title Schoren



Opmerking
Comment Slingtoestel

Datum
Date 3-11-2015

Tekening
Drawing

MOD SPT 001 005

Samenstelling module *Assembly module*

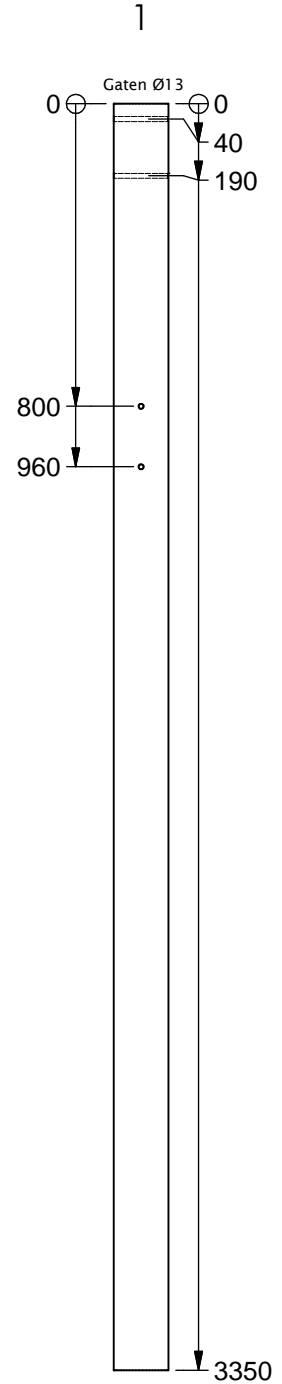

Nr	#	Type	Progr.	Volgnr	Bew.	Rev.	Benaming	Opmerking
1	2	ORE	SPT	001	023		Rebo Ø145	L= 3350



Benaming
Title Rebo Pakket

Opmerking
Comment SPT.100.240

Datum
Date 3-11-2015

Tekening
Drawing

MOD SPT 100 240

Samenstelling module Assembly module