



Climbingequipment





PSTE105.001



9,35 m


R1,75 m

5,62 m

- ☐ **Opvangzone**
Impact area
- ☐ **Obstakelvrije zone**
Obstacle free zone

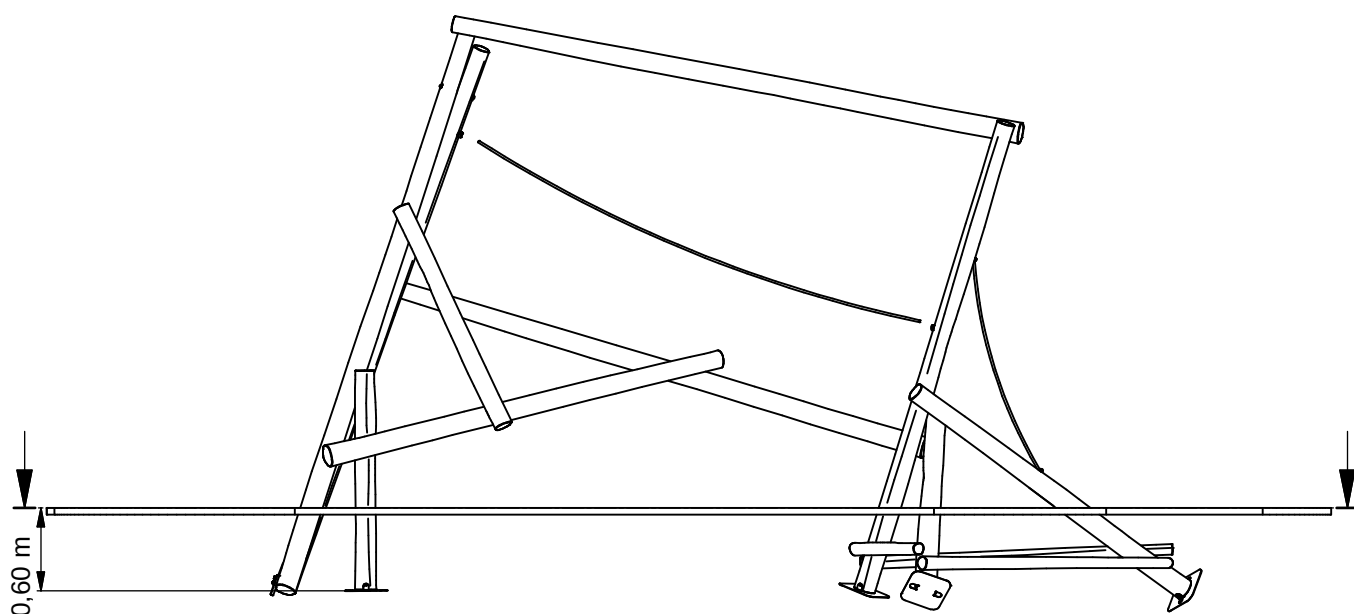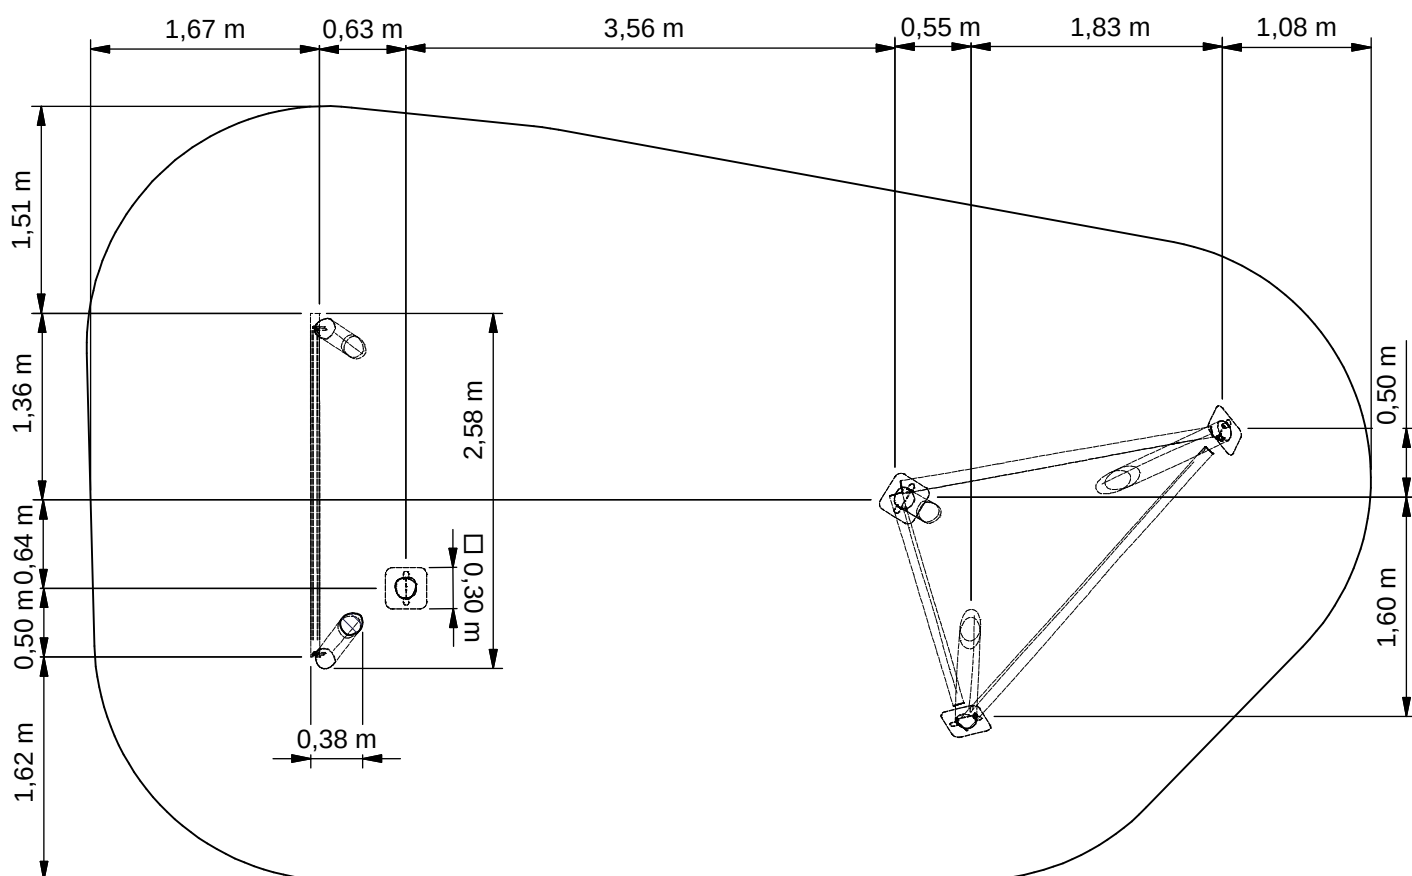

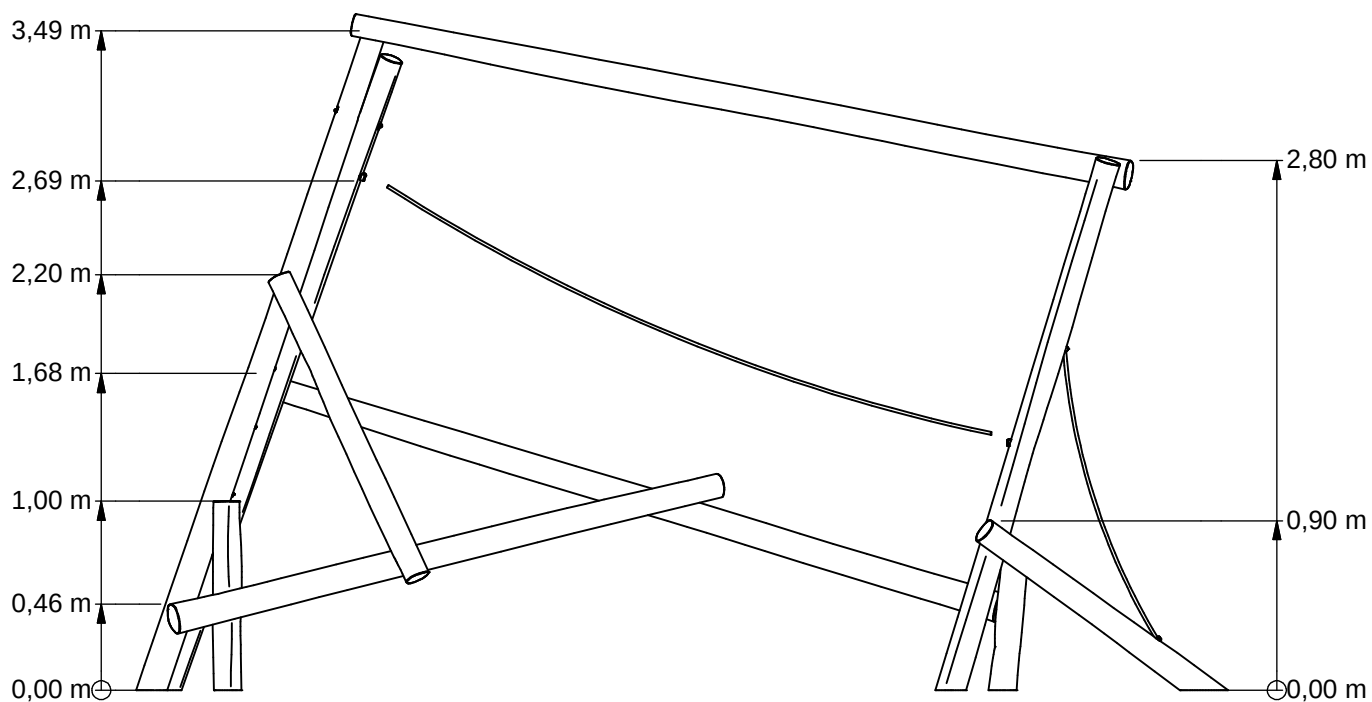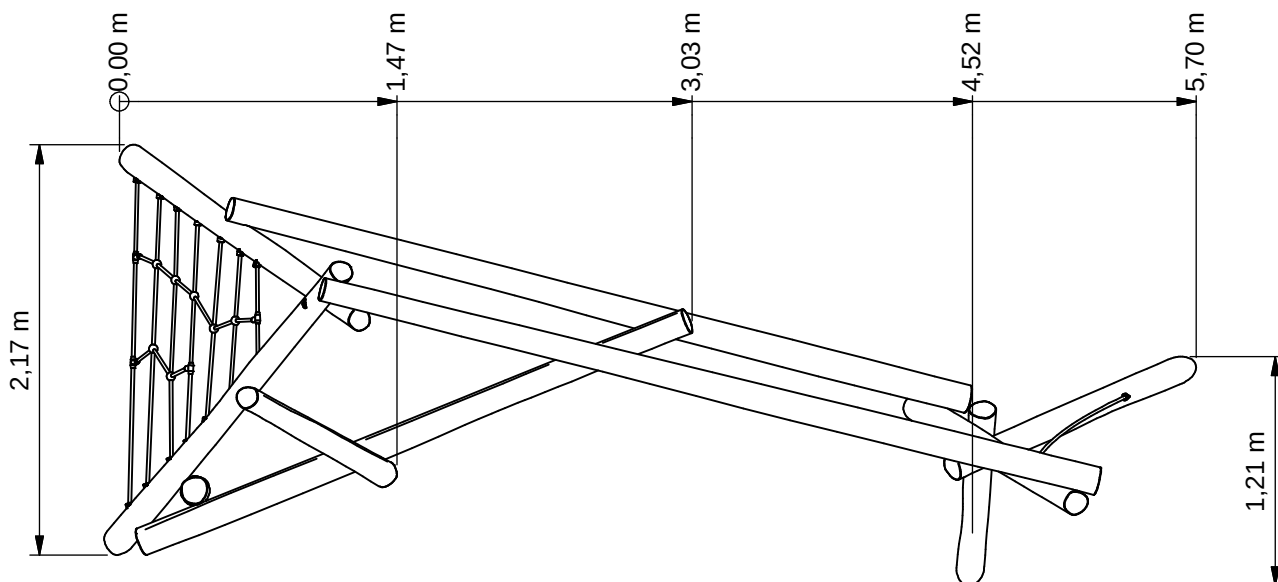

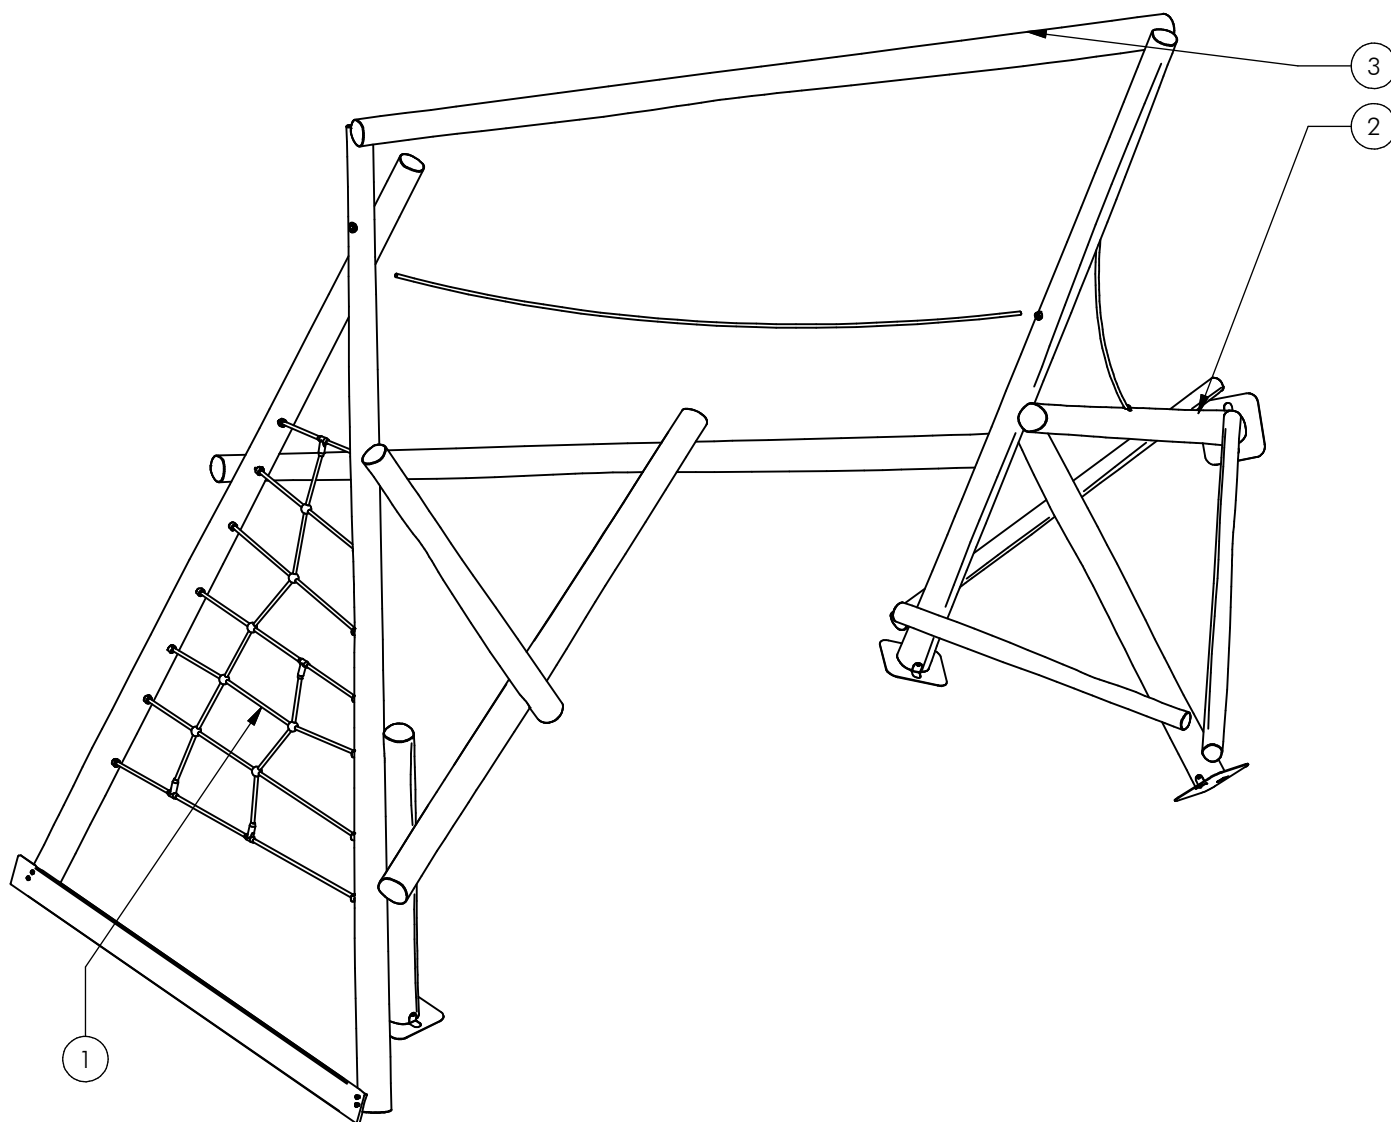

Nr	#	Type	Progr.	Volgnr	Bew.	Rev.	Benaming	Opmerking
1	1	MOD	PST	021	002	A	Opklimnet steil	Adventure Play
2	1	MOD	PST	022	003		Aanbouwtouw	Adventureplay
3	1	MOD	PST	105	001		Losse Palen	tbv PST.105.001

Geleverde delen:

- A - Paal lengte 3600
- B - Palen lengte 2000 en 2600
- C - Palen lengte 1600, 2300 en 2700
- D - Palen lengte 4500 en 4800 met Hercules net
- E - Paal lengte 2500
- F - Palen lengte 4200 en 4300
- G - Paal lengte 3200
- H - Paal lengte 1600
- I - Paal lengte 1800
- J - Hercules touwen

Bevestigings sets:

- 1 - RVS M12 verbindingssets voor alle palen
- 2 - Verzinkte veiligheidsschroeven

Montagevolgorde:

- 1 - Graaf de gaten volgens het bodemplan
- 2 - Plaats A, verbind A met B en C
- 3 - Plaats D, verbind D met E
- 4 - Verbind F met A en C
- 5 - Verbind G en H met D en F
- 6 - Verbind I met G en D
- 7 - Verbind J met 2 aan B en D
- 8 - Controleer of het toestel voldoet aan de afmetingen zoals op blad 'afmetingen'
- 9 - Dicht de gaten en verdicht het zand

Controles:

- 1 - Correcte opbouw en alle bevestigingsmiddelen
- 2 - Controleer de afmetingen van de valbodem t.o.v. het toestel
- 3 - De touwen mogen niet kruisen met elkaar of andere onderdelen van het toestel

Supplied parts:

- A - Post length 3600
- B - Posts length 2000 and 2600
- C - Posts length 1600, 2300 and 2700
- D - Posts length 4500 and 4800 with Hercules net
- E - Post length 2500
- F - Posts length 4200 and 4300
- G - Post length 3200
- H - Post length 1600
- I - Post length 1800
- J - Hercules ropes

Mounting kits:


- 1 - Stainless steel M12 fastener sets for all posts
- 2 - Galvanized steel safety screws

Assembly sequence:

- 1 - Dig the holes according to the ground plan
- 2 - Place A, attach A to B and C
- 3 - Place D, attach D to E
- 4 - Attach F to A and C
- 5 - Attach G and H with D and F
- 5 - Attach I to G and D
- 7 - Use 2 to attach J to A and D
- 8 - Check that the equipment conforms to the dimensions shown on sheet 'dimensions'
- 9 - Close the holes and compact the sand

Checks:

- 1 - Correct assembly and all the fasteners
- 2 - Check the dimensions of the safety area compared to the play equipment
- 3 - The ropes may not cross each other or other parts of the equipment

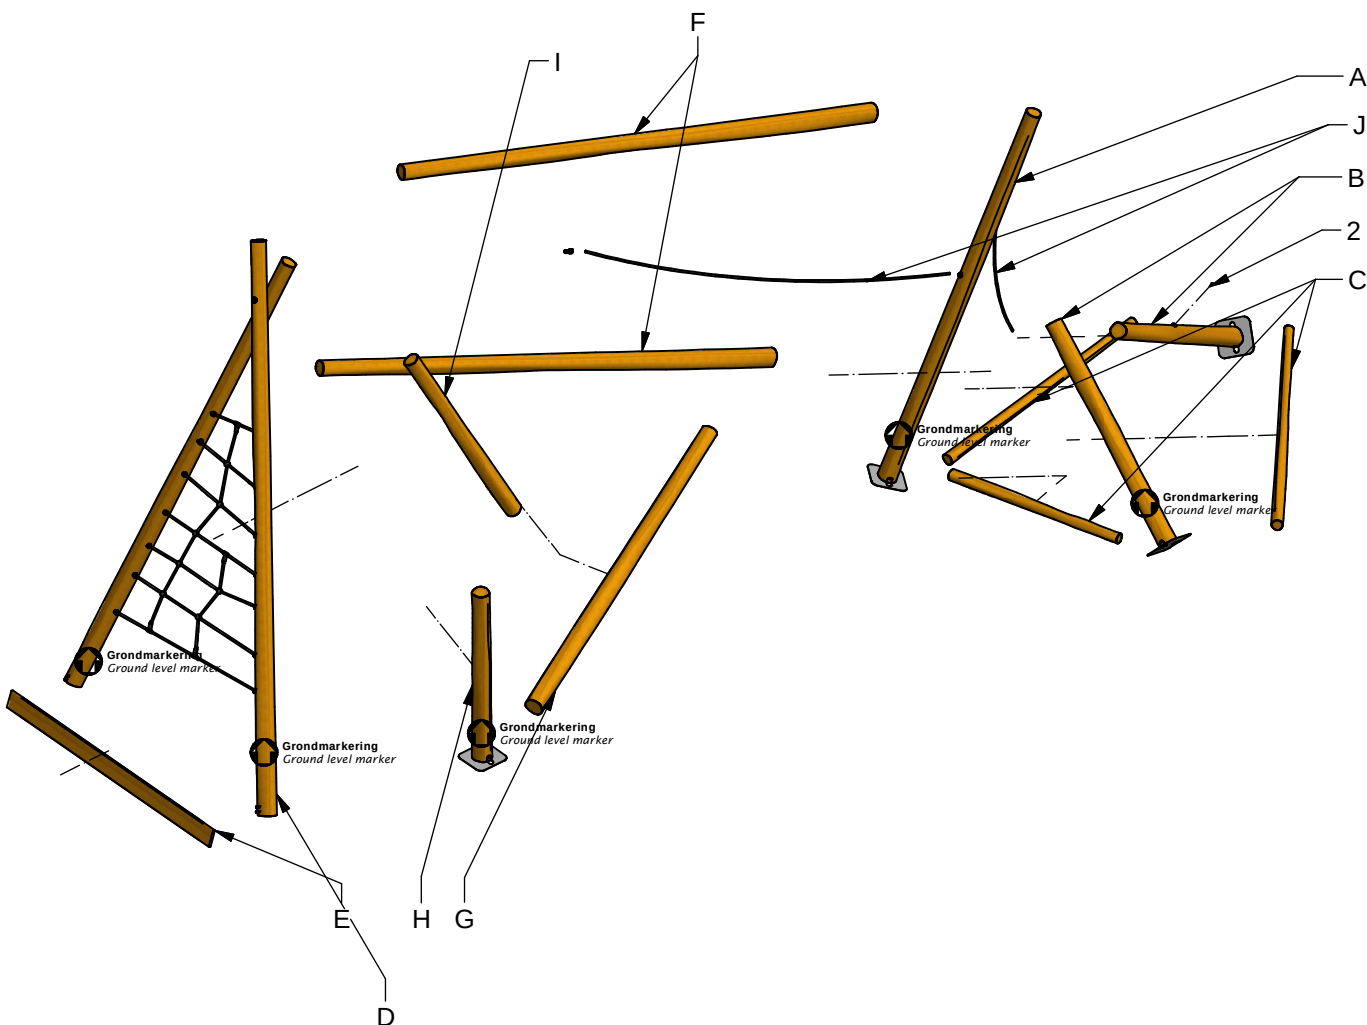

PSTE105.001

Climbingequipment

LOGBOOK

(Onderstaand logboek kan gebruikt worden om te voldoen aan de eisen, gesteld in artikel 14 van het Warenwetbesluit Attractie- en Speeltoestellen)

Type indication	Adventure Play
Product code	PSTE105.001
Name of equipment	Klimtoestel
Maximum height of fall	2,7 m
Year of construction	2017
Certificate	032899
inspection authority	TUV Nederland QA BV De Waal 21c, Best - 5684 PH Best
Name manufacturer	BOERplay Hyacintstraat 2 - 4255 HX Nieuwendijk Phone: +31 (0)183 40 23 66 Fax: +31 (0)183 40 35 64
name installer	
Description of equipment	Climbingequipment
Location of equipment	
Data about the owner of the play equipment	
Name:	
Address:	
Postcode and town:	
Contact person:	
Telephone number:	
Data about the administrator of the play equipment	
Name:	
Address:	
Postcode and town:	
Contact person:	
Telephone number:	

LOGBOOK

Inspection and maintenance intervals



Nr.	Inspection	Maintenance	months between inspections
1	Verify equipment's stability, junctions and missing parts. Inspect bolts, screws and nuts for absence, jams, corrosion and wear.	Add missing parts, secure joints, apply missing fixing agent and replace corroded parts.	1
2	Check suspension for wear.	Replace worn parts and/or remove non-functioning parts.	1
3	Inspect rotating parts such as hinges, rolling-element bearings, etc. for wear and acceptability.	Replace worn parts and/or remove non-functioning parts.	1
4	Check wood for splinters, unacceptable damage and signs of rot. Especially at ground level.	Repair damage. Replace affected wood. Smoothen splintered wood and sharp edges.	1
5	Inspect foundation for stability, tearing and coverage.	Restore foundation and covering material.	3
6	Examine rubber and synthetic parts for wear, damage and break.	Replace original parts.	3
7	Inspect metal for corrosion and damage in the coating.	Restore any damaged coating (after removing rust and applying primer).	6
8	Check ropes, cables, chains and nets for wear and damage. Steel cables and nets which are tensioned must be checked for tension.	Replace parts where necessary. Steel cables and nets must be tensioned.	3
9	Inspect equipment for unsafe changes and additions.	Remove unsafe additions and correct unsafe changes.	1
10	Inspect safety surfaces.	Restore and repair where necessary.	1

Remarks

1. If used intensively, all points require extra attention.
2. Extreme weather conditions and locations may require a higher inspection frequency. Discuss this with the supplier.
3. Vandalism-sensitive locations require stricter inspections, possibly daily.
4. Check the terrain regularly for items that do not belong there, are unsafe or may be used wrongly. Examples are poisonous plants, glass shards, etc. Frequency depends on strain.
5. Remember that bad maintenance leads to unsafe conditions and notably faster impoverishment of the playground area.
6. Replacement parts can be ordered at the manufacturer with the part numbers on the module drawing. Drawings can be found in the user guide.
7. The impact area shall be provided with impact attenuating surface according to the specified falling height.
8. This list is conform the CEN-standard "playground equipment and surfacing NEN-EN 1176-7".

Warenwet

Certificaat van Typeonderzoek Type Examination Certificate

afgegeven door issued by

TÜV Nederland QA BV

aangewezen bij ministeriële beschikking van
4 mei 2012, nr. VGP 3113590


commissioned by departmental order
of 4 May 2012, no. VGP 3113590







Certificaat nr. Certificate nr.	032899TA_20130923	Dossiernr. File nr.	032899TA
Productomschrijving Product description	Palenwoud PST.105.001		
Evt. nadere aanduidingen Further indications	Adventure Play		
voor nadere informatie zie bijbehorend rapport met gelijkluidend dossiernr. for further information see associated report with identical file nr.			
Eigenaar / certificaathouder en adres Owner/certificate holder and address	Boer Speeltoestellen B.V. Hyacintstraat 2 4255 HX NIEUWENDIJK		
Soort toestel Category of equipment	Speeltoestel / Playground equipment		
Fabrikant Manufacturer	Boer Speeltoestellen B.V. Hyacintstraat 2 4255 HX NIEUWENDIJK		
Type/Serienummer Type/Serial number	PST.105.001 /		in te vullen door de fabrikant to be filled out by the manufacturer
Jaar van fabricage Year of construction	vanaf 2012 since		
Leverancier Supplier	Boer Speeltoestellen B.V. Hyacintstraat 2 4255 HX NIEUWENDIJK		
Jaar van leverantie Year of supply	in te vullen door de leverancier to be filled out by the supplier		
Datum keuring Date of examination	30-06-2013 – 23-09-2013		





TÜV Nederland QA BV, de Waal 21C, NL-5684 PH Best verklaart, dat het bovenaangehaalde toestel voldoet aan de vervaardigingvoorschriften genoemd in het Warenwetbesluit attractie- en speeltoestellen (met als leidraad de normatieve documenten NEN-EN 1176:2008).

TÜV Nederland QA BV declares that the here above mentioned equipment meets the safety and health requirements mentioned in the Dutch law "Warenwetbesluit attractie- en speeltoestellen" (guided by normative documents EN 1176:2008).




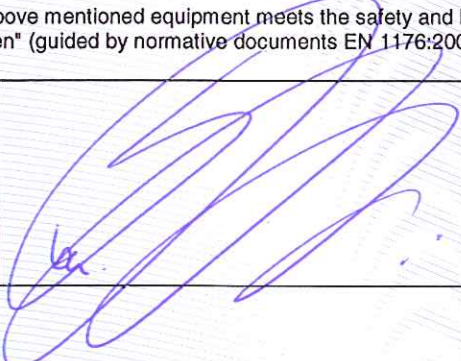
Namens het bestuur, For the board, A.C. Boon Directeur	
---	--

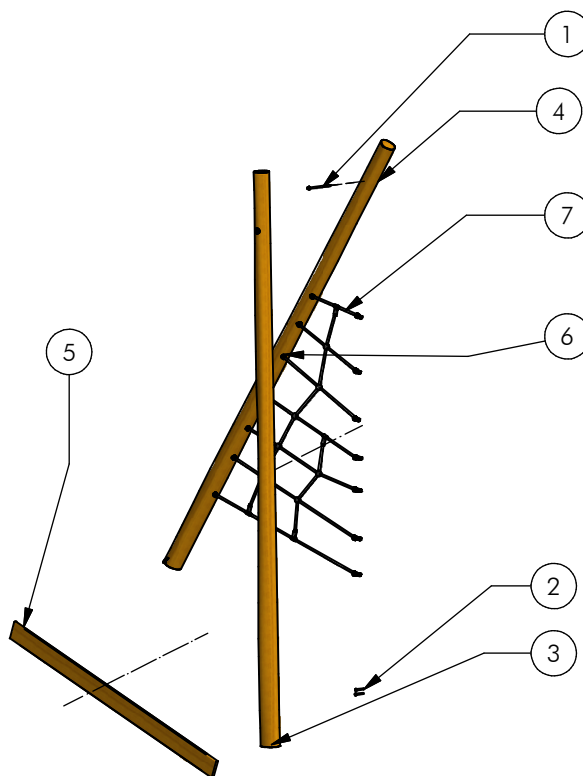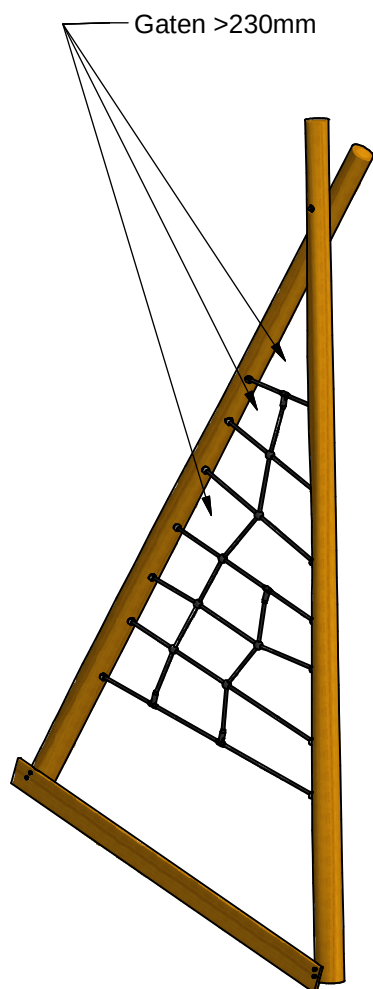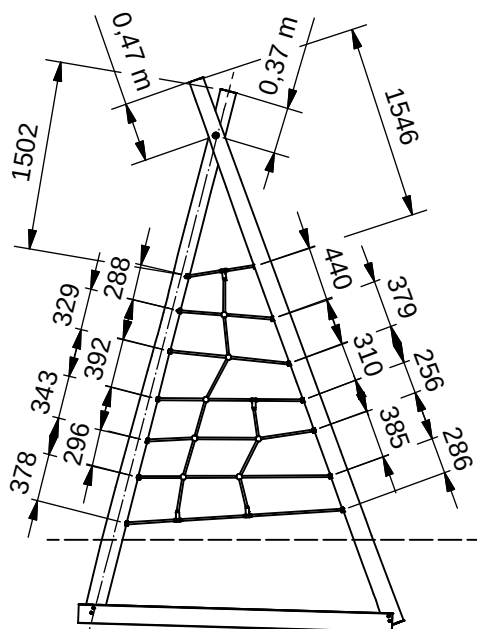

Nr	#	Type	Progr.	Volgnr	Bew.	Rev.	Benaming	Opmerking
1	1	BMR	SET	M12	240		Draadeind+dopm.+ringen	M12, L= 240, RVS A2-70
2	4	BSR	O22	010	060		Houtdraadbout	ø10 X 60 - RVS A2-70
3	1	OHO	PST	160	046		Paal 14-16	Lengte =4600
4	1	OHO	PST	160	043		Paal 14-16	Lengte =4300
5	1	OHO	PST	212	250		Plank 150x20	Lengte = 2500
6	14	SMD	BUS	002	RVS		Bus + VZ schroef	Touw 16 mm
7	1	SNT	PST	016	002	C	Opklimnet steil	Adventure Play

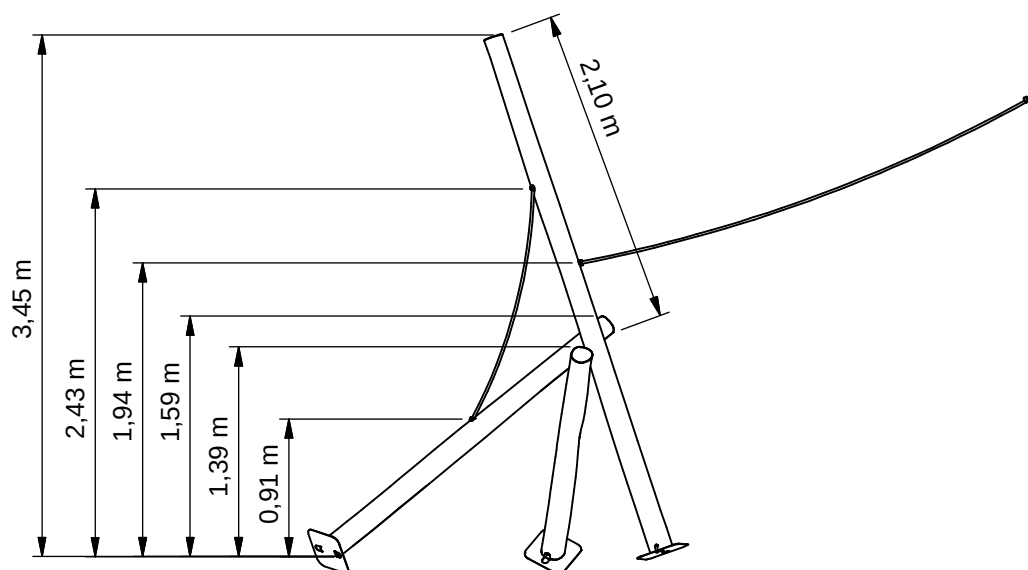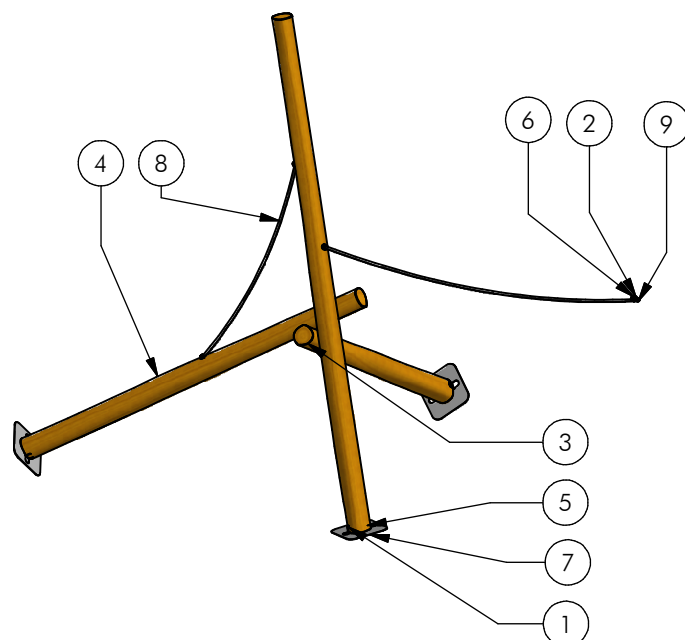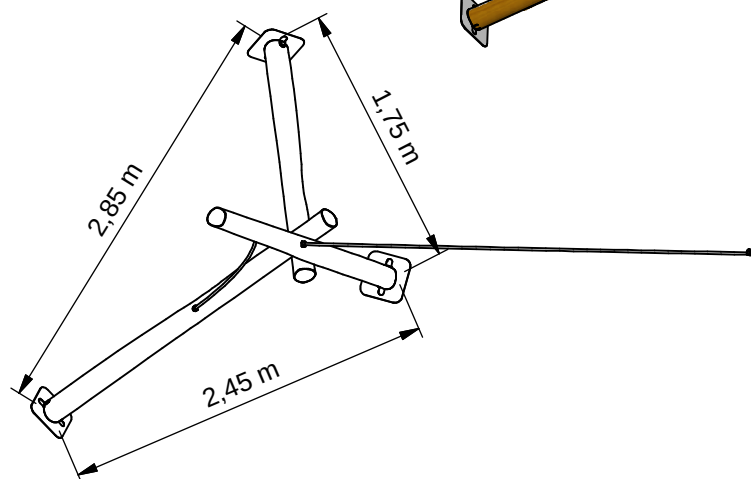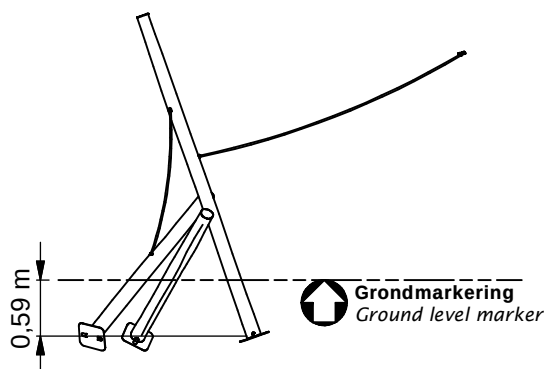

Nr	#	Type	Progr.	Volgnr	Bew.	Rev.	Benaming	Opmerking
1	6	BSV	004	005	050		Schroef verz.	5 x 50 - VZ 8.8
2	4	BSV	025	006	030		Veiligheidsschroef	Pin-Torx - VZ 8.8
3	1	OHO	PST	160	020		Paal 14-16	Lengte =2000
4	1	OHO	PST	160	027		Paal 14-16	Lengte =2700
5	1	OHO	PST	160	036		Paal 14-16	Lengte =3600
6	4	OME	BUS	002	RVS		Bus RVS schroef	touw d16
7	3	OME	JGP	001	VZP		Voetplaat	Jungleplay
8	1	ONT	PST	016	005		Touw 1,75m	16mm diameter
9	1	ONT	PST	016	330		3,3	16mm doorsnede

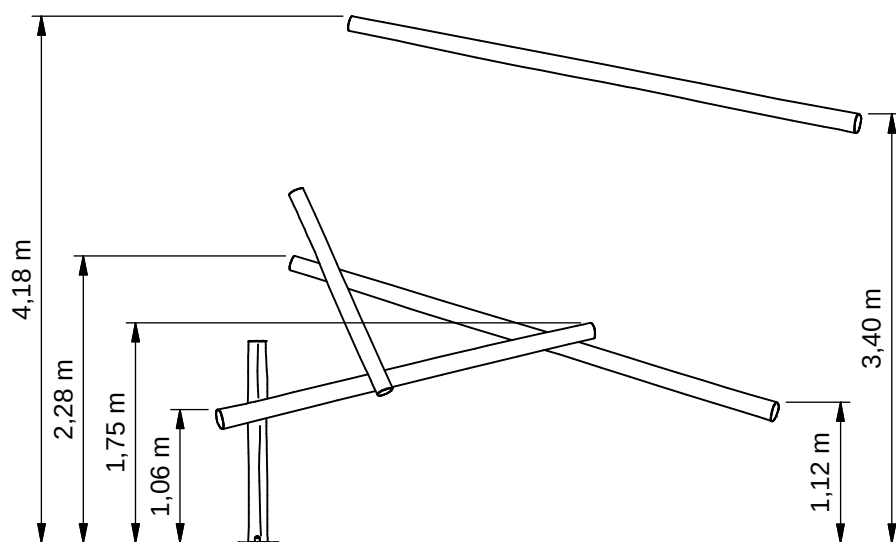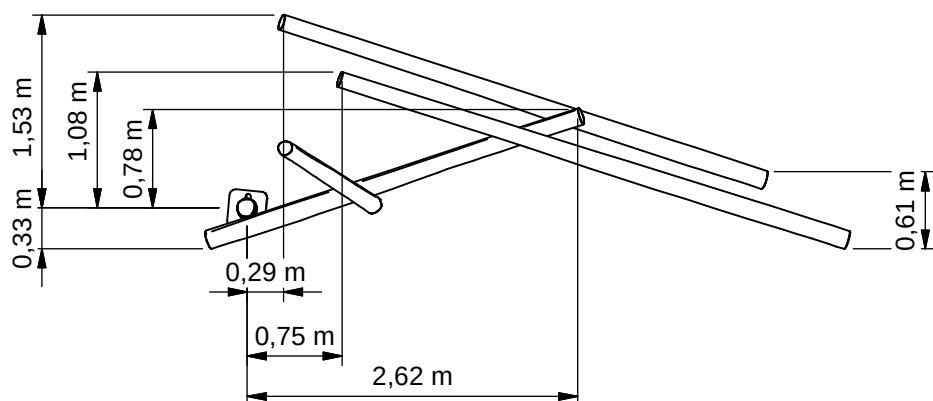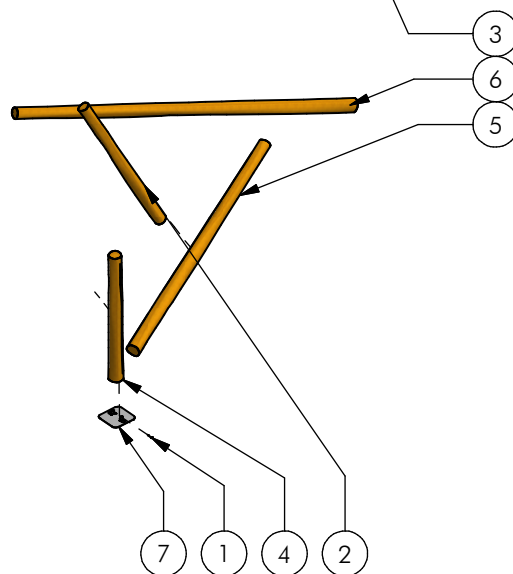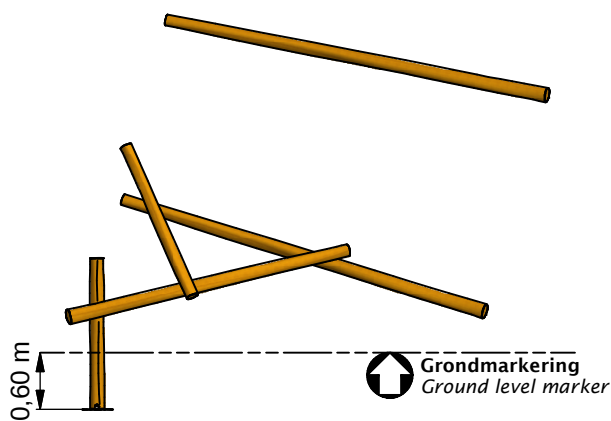

Nr	#	Type	Progr.	Volgnr	Bew.	Rev.	Benaming	Opmerking
1	2	BSV	004	005	070		Schroef verz.	5 x70 - VZ 8.8
2	1	OHO	PST	140	018		Paal 12-14	Lengte =1800
3	1	OHO	PST	160	043		Paal 14-16	Lengte =4300
4	1	OHO	PST	160	016		Paal 14-16	Lengte =1600
5	1	OHO	PST	160	032		Paal 14-16	Lengte =3200
6	1	OHO	PST	160	042		Paal 14-16	Lengte =4200
7	1	OME	JGP	001	VZP		Voetplaat	Jungleplay